


FIRE FIGHTING PUMP PH-ALFA 2

The PH-ALFA, fire fighting pump is equipped with a Honda GX 630 V-Twin 4-stroke engine. The engine is covered by 3-year warranty. The pump features a very low weight, only 88 kg (dry weight with the battery), and a compact design. Due to its weight and size, it can be very easily transferred by only two firefighters to the vicinity of fire, even in narrow and uneven terrain. The pump inlet is 4" with a strainer and 2x outlet 2,5" equipped with a ball valve. The pump is equipped with an anti-vibration frame and hinged handles. We offer two types of fire fighting pumps: with a built-in or separate tank.


PH - ALFA 2 engine driven pump features:

- professional two-cylinder air-cooled four-stroke OHV petrol engine with automatic mechanical speed control
- high-performance pump chamber
- fixed engine-pump assembly as one construction block
- anti vibration support of the aggregate
- robust, ergonomically designed tubular frame
- electric starter
- conventional fuel
- allows long-term full load
- speed control
- gas vacuum pump
- pressure gauge at the outlet from the chamber
- ball valve at discharge
- system monitoring of oil level
- ceramic mechanical seal
- equipped with lighting
- operating hour counter
- bronze impeller

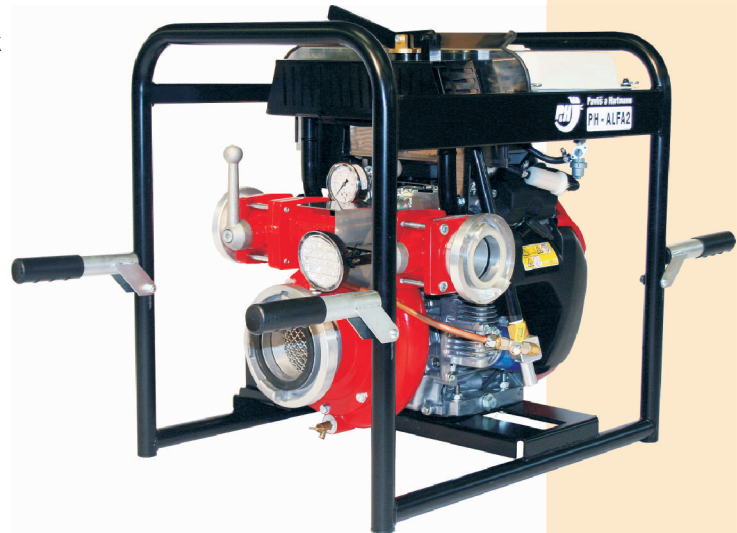

Warning: The pump must not be run in enclosed areas as there is a danger of carbon oxide poisoning!!!

| PH-ALFA 2 | |
|---|-------------------------|
| • Max. flow | 2 055 l/min |
| • Flow at 0,5 MPa | 1003 l/min |
| • Flow at 0,6 MPa | 795 l/min |
| • Total head | 80 m |
| • Max. suction depth | 8 m |
| • Suction connection | Storz A110 (4") |
| • Discharge connection | 2x Storz B75 (2,5") |
| • Engine | Honda GX 630 |
| • Engine power | 15.5 kW / 20.8 HP |
| • Integrated fuel tank capacity | 13 l |
| • Separate fuel tank capacity | 12 l |
| • Fuel | unleaded petrol (BA 95) |
| • Device dimensions separate tank (L x W x H) | 750 x 560 x 670 mm |
| • Device dimensions integrated tank (L x W x H) | 750 x 560 x 700 mm |
| • Dry weight of the separate tank | 1.6 kg |
| • Dry weight (empty) | 88 kg |
| • Weight (with full tanks) | 103 kg |

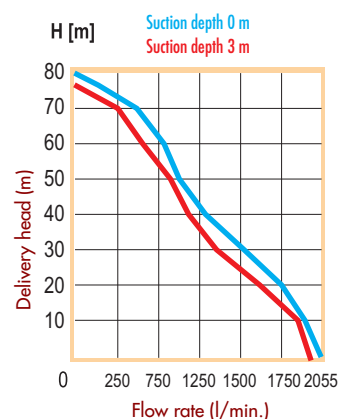

FIRE FIGHTING PUMP PH-ALFA 2 with integrated tank

Cat. No.: **vv 298-A**

FIRE FIGHTING PUMP PH-ALFA 2 with separate tank

Cat. No.: **vv 298-B**



The data was measured by the accredited testing laboratory TÜPO No. 1011-2

POWERED by
HONDA

